



PARTIAL INLET

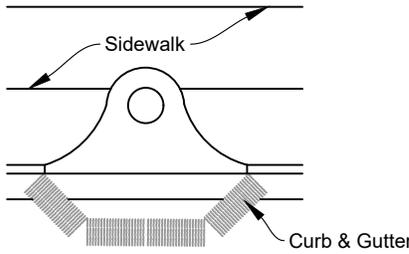



COMPLETED INLET

Anchor Bales With 2 - 2" x 2" x 4' Stakes Per Bale.

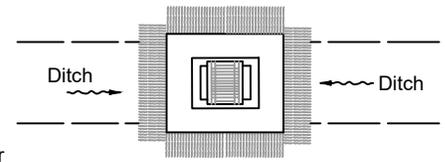


DITCH BOTTOM INLET

**PROTECTION AROUND INLETS OR SIMILAR STRUCTURES**

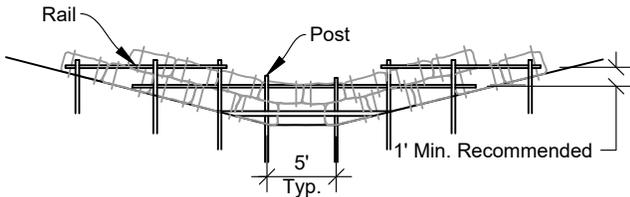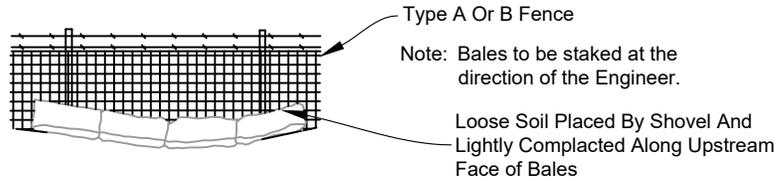

Anchor Bales With 2 - 2" x 2" x 4' Stakes Per Bale.  
Anchor Top Bales To Lower Bales With 2 - 2" x 2" x 4' Stakes Per Bale.

ELEVATION  
TYPE II

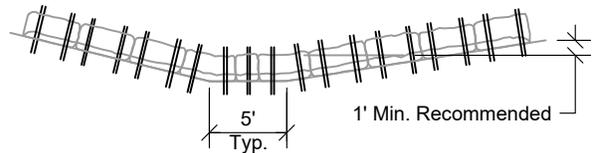


Anchor Bales With 2 - 2" x 2" x 4' Stakes Per Bale.


ELEVATION  
TYPE I

Application and Spacing: The use of Types I & II bale barriers should be limited to the conditions outlined in Chart 1, Sheet 1 of 3, Index No. 102, FDOT standard specifications.

**BARRIER FOR UNPAVED DITCHES**

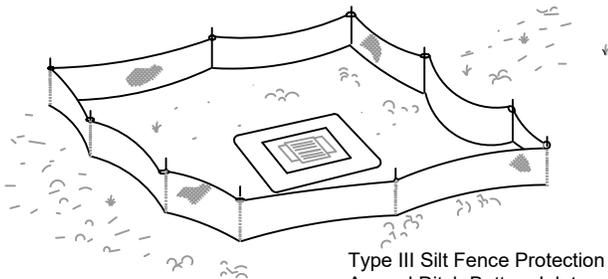

Type III Silt Fence Protection Around Ditch Bottom Inlets.

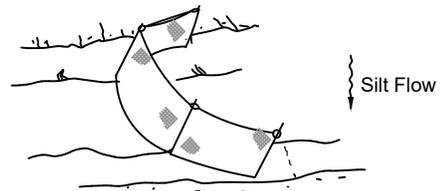

Note: Spacing for Type III Fence to be in accordance with Chart 1, Sheet 1 of 3, and ditch installations at drainage structures Sheet 2 of 3.

Type III Silt Fence

Do not deploy in a manner that silt fences will act as a dam across permanent flowing watercourses. Silt fences are to be used at upland locations and turbidity barriers used at permanent bodies of water.

**SILT FENCE APPLICATIONS**

NOT TO SCALE

**BALED HAY OR STRAW BARRIERS AND SILT FENCES**