

6" COMPACTED ASPHALT BASE COURSE
OVER COMPACTED SUBGRADE, SLOPED
DOWN AT 30 DEGREES. MIN. THICKNESS
OF 2" ON OUTSIDE EDGE

NEW SOD NEAR EDGE OF PAVEMENT SHALL
BE ESTABLISHED AT PAVEMENT ELEVATION


IF IN CONTRACT, RE-ESTABLISH ROADSIDE
SWALEAS REQUIRED TO MATCH EXISTING
OR AS DEFINED BY TOWN ENGINEER

DISTURBED AREAS SHALL BE SODDED. SOD SHALL
BE PLACED WITH TIGHT JOINTS WITHOUT OVERLAP.
SHOULDER MUST SLOPE TOWARD SWALE.
THE CONTRACTOR SHALL WATER SOD UNTIL A FIRM
ROOT SYSTEM IS ESTABLISHED (MINIMUM 3 TIMES
PER WEEK FOR 21 DAYS).

SHOULDER RESTORATION - BACKFILL WITH 6" OF ASPHALT
BASE COURSE MEETING FDOT SPECIFICATION 331 OR APPROVED EQUAL
MECHANICALLY COMPACTED AS APPROVED BY THE TOWN

NOTES:

THE CONTRACTOR SHALL EXCAVATE ONLY ENOUGH SHOULDER THAT
CAN BE RESTORED THAT SAME DAY. NO TRENCH OR DROP-OFFS
WILL BE ALLOWED OVER NIGHT.

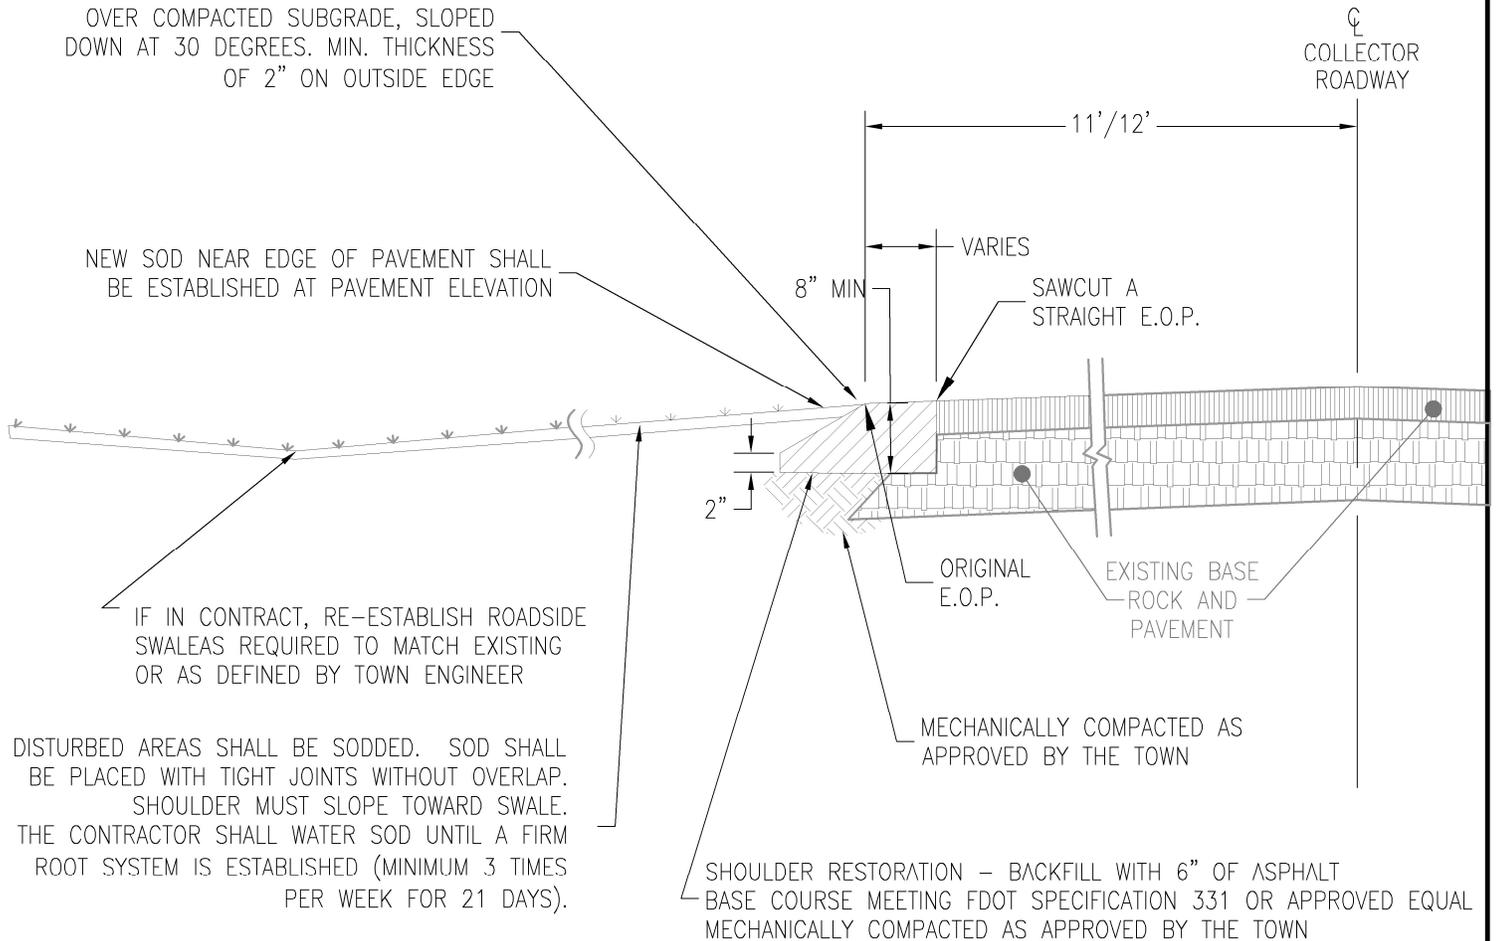

TOWN OF JUPITER
ENGINEERING DIVISION

210 MILITARY TRAIL
JUPITER, FLORIDA 33458
(561) 746-5134

COLLECTOR ROADWAY
SHOULDER RESTORATION
DETAIL AND REQUIREMENTS

V:\Engineering\Drawings\Details\2025\123 - Shoulder Restoration - Black Base.dwg

DETAIL NUMBER

123

Revised 20120515