



DOUBLE METER SET

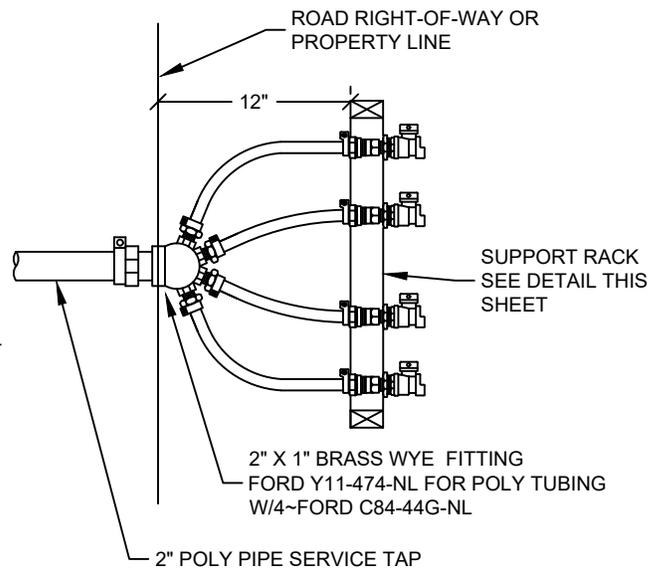

MULTI-METER SET

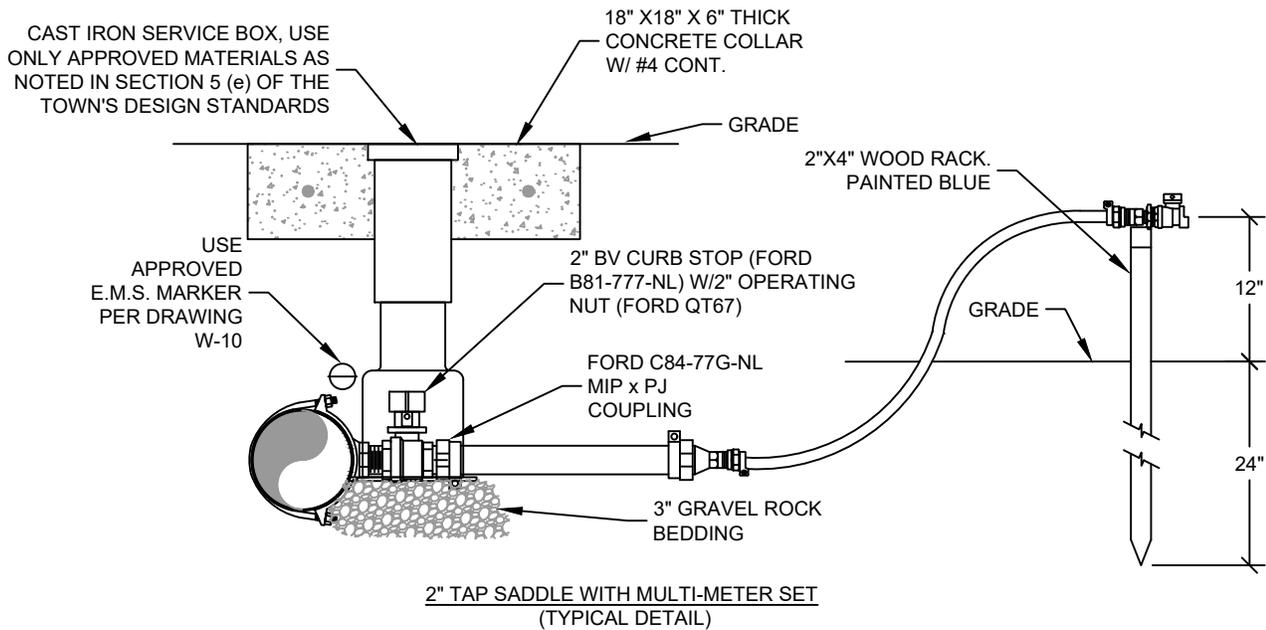

NOTES:

1. 3/4" MULTI-METER SETS SHALL BE MULTIPLE SINGLE GULF BOXES WITH GBV83-32-NL BRASS METER BALL VALVE AND C14-34G-NL ADAPTER.
2. SERVICE LINES SHALL BE 2" PE3408 HDPE POLY TUBING, ASTM D-2737 FOR 200PSI WITH PERMANENT SPECIFICATION MARKINGS. TUBING FITTINGS SHALL REQUIRE STAINLESS STEEL INSERTS.
3. ALL MATERIAL SHALL BE APPROVED BY THE TOWN OF JUPITER WATER UTILITIES PRIOR TO INSTALLATION.
4. CONTRACTOR SHALL MAINTAIN A MINIMUM OF 36" UNOBSTRUCTED AREA AROUND THE OUTSIDE EDGE OF THE METER BOX.
5. TAPPING SADDLES:
FOR D.I.P. USE 2" DOUBLE STRAP TAP SADDLE 202B STYLE WITH IP7 OUTLET THREADS.
FOR C-900 PVC, USE FORD S-91 SERIES TAP SADDLE WITH 2" IPS THREADS.

NOT TO SCALE

3/4" MULTI-METER SET CONNECTION DETAIL