


HORIZONTAL
PARKING DETAIL

PARALLEL PARKING DETAIL

ADA ACCESSIBLE PARKING SPACES
(REQUIRED MINIMUM)

TOTAL PARKING SPACES REQUIRED OR PROVIDED IN LOT	ACCESSIBLE SPACES
1 TO 25	1
26 TO 50	2
51 TO 75	3
76 TO 100	4
101 TO 150	5
151 TO 200	6
201 TO 300	7
301 TO 400	8
401 TO 500	9
501 TO 1,000	2% OF TOTAL
1,001 AND OVER	20**

** PLUS ONE SPACE FOR EACH 100 OVER 1,000.

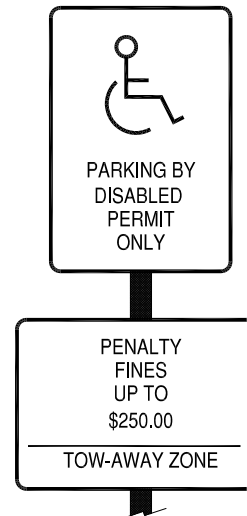

SIGN REQUIREMENTS
PER FLORIDA STATE STATUTE

ALL ADA ACCESSIBLE PARKING MUST BE SIGNED AND MARKED IN ACCORDANCE WITH THE STANDARDS ADOPTED BY FLORIDA STATUTES.

ALL SPACES SHALL HAVE AN ADJACENT ACCESS AISLE 60 INCHES WIDE MINIMUM. TWO ADA ACCESSIBLE PARKING SPACES MAY SHARE A COMMON ACCESS AISLE.

CURB RAMPS MUST BE LOCATED OUTSIDE OF THE ACCESS AISLE AND PARKING SPACE.

ACCESS AISLES AND ADA ACCESSIBLE PARKING SPACES MUST NOT EXCEED A SLOPE OF 1 TO 50 DEGREES IN ANY DIRECTION.



TOWN OF JUPITER
ENGINEERING DIVISION

210 MILITARY TRAIL
JUPITER, FLORIDA 33458
(561) 746-5134

ADA ACCESSIBLE PARKING
DETAIL AND REQUIREMENTS

K:\Drawings\Details\2019\101 - parkhc.dwg

DETAIL NUMBER

101

Revised 20190403